


MIC-US-2




ATLAS SOUND

COMMUNICATIONS PRODUCTS

US-2

Specifications — Boom arm length 12 $\frac{3}{4}$ "; vertical adjustment of boom 180°; rotation 360°; base length 2 $\frac{5}{8}$ ".




Multi-Purpose Microphone support designed for a wide variety of applications in conjunction with podium, language labs, dispatcher console, desk or table-top installations where flexibility in horizontal positioning and vertical adjustment as well as the ability to conceal microphone cable are desired.

Equipped with 5/8"-27 male thread for microphone or microphone holder attachment. Adjustable tension is provided for mobility and to control microphone positioning. Vertical adjustment of boom 180 degrees, rotation 360 degrees. Boom arm length; 12-3/4". Mounting base is heavy-duty triangular flange, 2" wide X 2-5/8" long; three mounting holes are provided. Chrome plated finish. Shipping weight 1 lb.

OPTIONAL ACCESSORIES:

ATLAS SOUND Model VM-1 is recommended for shock mount of microphone. Models LO-2 or SO-1 are suggested for quick disconnect of microphone.

INTERNAL INSTALLATION OF MICROPHONE CABLE AT SWIVEL SUPPORT BRACKET:

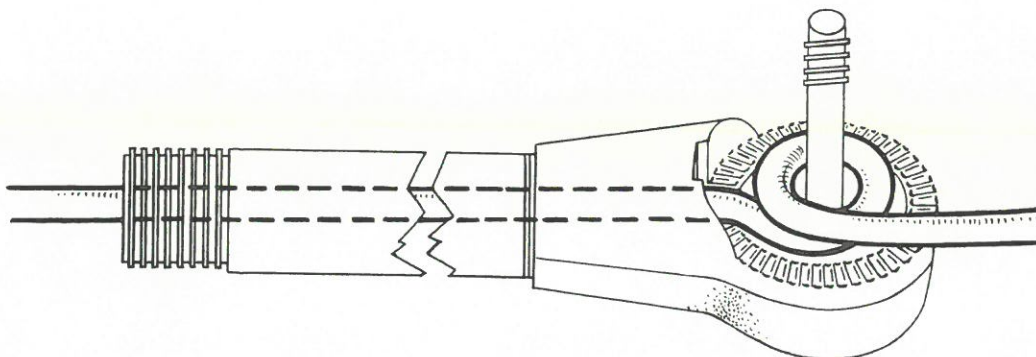

FOR INTERNAL FEED-THRU WIRING, WRAP ONE TURN OF MICROPHONE CABLE AROUND BOLT AS SHOWN ON ILLUSTRATION. RE-ASSEMBLE PARTS IN REVERSE ORDER AS REMOVED.

ATLAS SOUND

DIVISION OF AMERICAN TRADING AND PRODUCTION CORPORATION
10 POMEROY ROAD, PARSIPPANY, NEW JERSEY 07054
TELEPHONE: 201 887-7800