surplussales.com

Anaren

Model 40267

Power Dividers

2-Way

Aluminum Cased Connectorized Components

Applications

- Phased Arrays
- Antenna Feed Networks
- Image Reject Mixers
- Test Systems
- LO Power Dividers

Features

- Military Grade
- 2-Way Power Split
- In-Phase
- Connectors Per MIL-C-39012
- Rugged Aluminum Housing
- Low VSWR

Electrical Specifications

Frequency *GHz*	Isolation *dB Min*	Insert. Loss *dB Max*	VSWR *Max In/Out : 1*
4.0 - 8.0	18	0.70	1.60/1.60

Amp. Bal. *dB Max*	Phase Bal. *Degrees Max*	Connector	Power *Ave. CW Watts*
0.40	6	SMA	10

Notes: *Input power with load VSWR of 1.20:1. Impedance: 50 ohms nominal. Meets MIL-E-5400 Class III requirements. Additional screening available for military and space applications.
Electrical and Mechanical Specifications subject to change without notice.

Outline Drawing

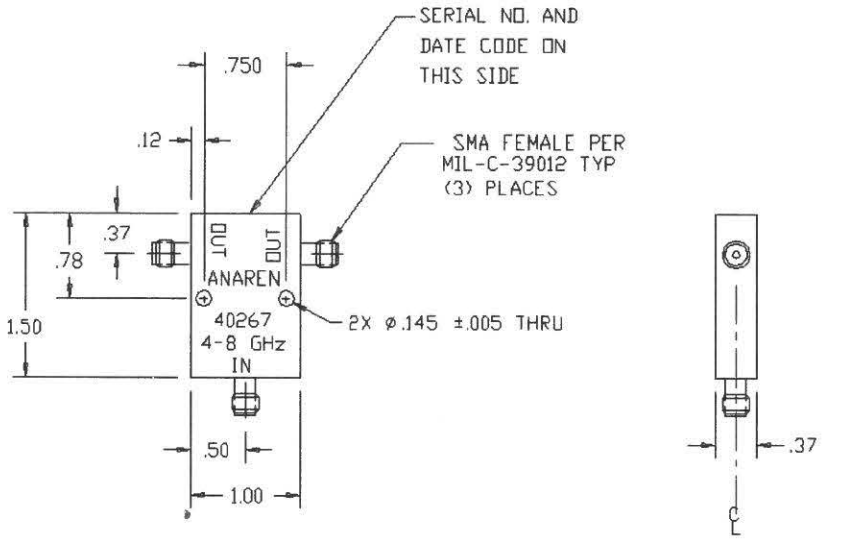

NOTES:
1. MARK PER MIL-STD-130
2. FINISH: EPOXY PRIMER
   BLUE EPOXY PAINT
3. DIMENSIONS ARE IN INCHES

Sales Desk USA: Voice: **(800) 544-2414** Fax: **(315) 432-9121**
Sales Desk Europe: Voice: **(+44) 23 92 232392** Fax: **(+44) 23 92 251369**

Anaren
What'll we think of next?™