


KO-M55757/23-001, 2T-2911-1, B07D692BZ2-0011

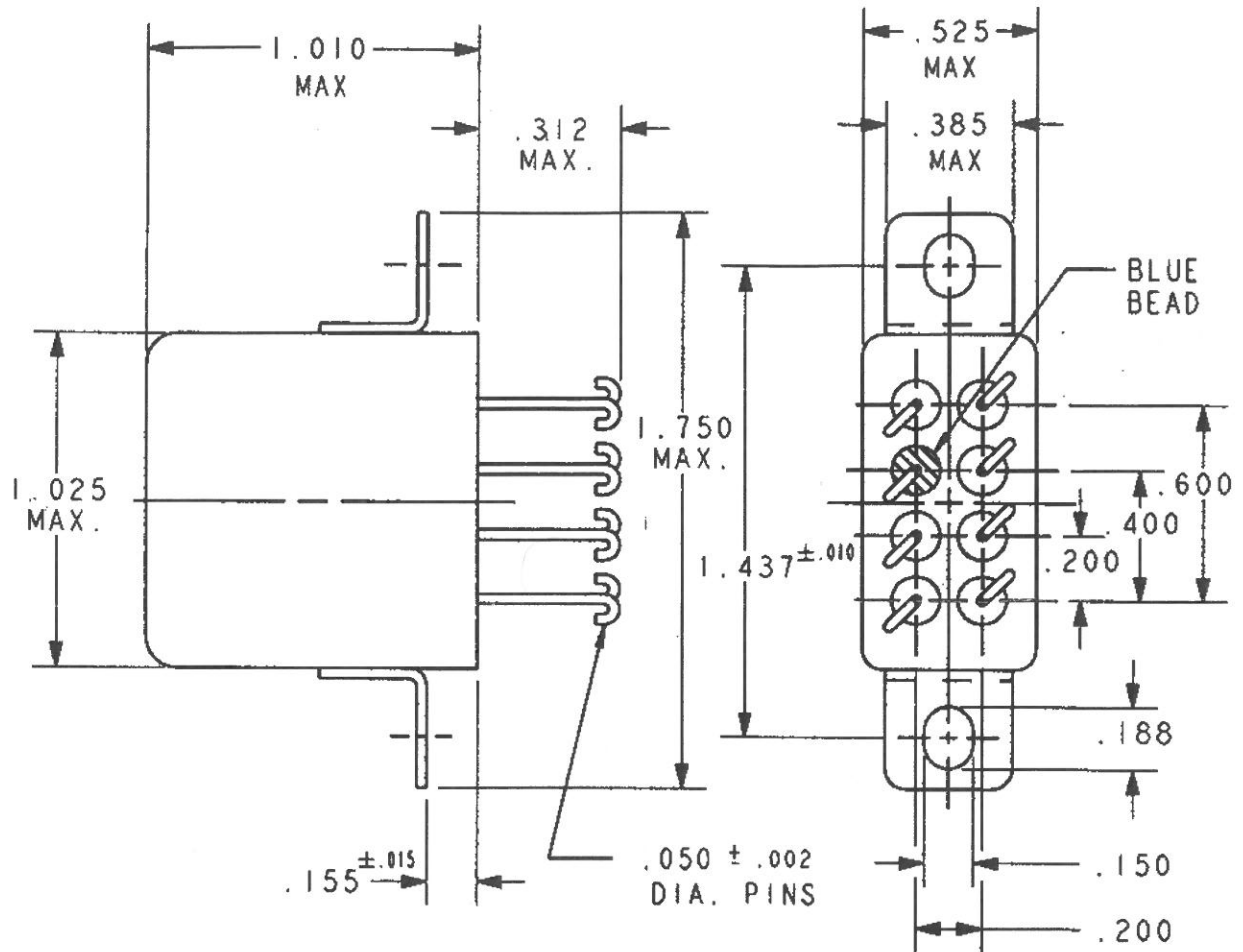


REV. 5
DCO 102710

COIL: @ 25°C	
RESISTANCE	300 OHMS ±10%
NOMINAL VOLTAGE	26.5 VDC
MUST OPERATE	13.0 VDC
MUST RELEASE	2.3 VDC

ENVIRONMENT:	
VIBRATION	10 CPS TO 2000 CPS @ 20 g's
SHOCK	50 g's 11 MS. DURATION
TEMPERATURE	-65 °C TO +125 °C
NOTES:	OPERATE & RELEASE 15 MS MAX.
	OPERATE BOUNCE 5 MS MAX.
	RELEASE BOUNCE 5 MS MAX.

CUSTOMER DATA SHEET

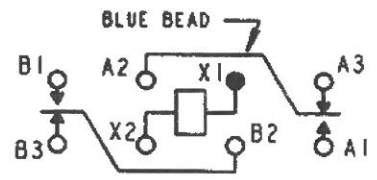

TERMINAL VIEW

CONTACT RATING:	10 AMPS 28 VDC
	5 AMPS 115 VAC/400 H ₂ RESISTIVE
	50,000 OPERATIONS

CUST. QPL
CUST. NO. M5757/23-001 REV. _____

"07" RELAY

B07D692BZ2-0011