


TUNG-SOL

DOUBLE DIODE

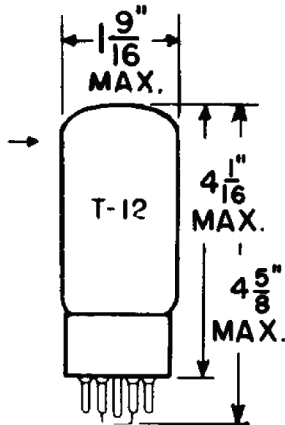

GLASS BULB


COATED FILAMENT

5.0 VOLTS 3.0 AMP.

AC OR DC

VERTICAL MOUNTING POSITION

HORIZONTAL OPERATION IS PERMITTED
IF PINS 1 AND 4 ARE IN A VERTICAL
PLANE.



BOTTOM VIEW

MEDIUM SHELL
5 PIN OCTAL

5T

THE 5U4GB IS A FILAMENTARY FULL-WAVE HIGH VACUUM RECTIFIER DESIGNED FOR USE IN THE POWER SUPPLY OF TELEVISION RECEIVERS AND OTHER EQUIPMENT WHICH HAS HIGH OUTPUT CURRENT REQUIREMENTS. IT IS A REPLACEMENT FOR THE 5U4G; HOWEVER, THE 5U4GB HAS A STRAIGHT SIDED T-12 ENVELOPE AND HAS HIGHER CURRENT RATINGS THAN THE 5U4G.

RATINGS

INTERPRETED ACCORDING TO DESIGN CENTER SYSTEM

RECTIFIER SERVICE^A

FILAMENT VOLTAGE	5.0	VOLTS
MAXIMUM PEAK INVERSE PLATE VOLTAGE	1550	VOLTS
MAXIMUM PLATE SUPPLY VOLTAGE (EACH PLATE) RMS (SEE RATING CHART #1)	550	VOLTS
MAXIMUM DC OUTPUT CURRENT (SEE RATING CHART #1)	---	
MAXIMUM STEADY STATE PEAK PLATE CURRENT (EACH PLATE) SEE RATING CHART #2	1.0	AMP.
MAXIMUM TRANSIENT PEAK PLATE CURRENT (EACH PLATE) SEE RATING CHART #3	4.6	AMP
TUBE VOLTAGE DROP		
TUBE CONDUCTING: 225 MA. EACH PLATE	44	VOLTS
275 MA. EACH PLATE	50	VOLTS
300 MA. EACH PLATE	54	VOLTS

^A FOR USE WITH SINUSOIDAL SUPPLY VOLTAGES WITHIN THE FREQUENCY RANGE OF 25 TO 1000 CYCLES PER SECOND.

→ INDICATES A CHANGE.

CONTINUED ON FOLLOWING PAGE

TYPICAL OPERATING CONDITIONS AND CHARACTERISTICS

FULL-WAVE RECTIFIER - CAPACITOR INPUT FILTER

FILAMENT VOLTAGE	5.0	VOLTS
FILAMENT CURRENT	3.0	AMP.
AC PLATE SUPPLY VOLTAGE (EACH PLATE) RMS ^B	300 450	VOLTS
FILTER INPUT CAPACITOR	40 40	μ f
EFFECTIVE PLATE-SUPPLY RESISTANCE (EACH PLATE)	21 67	OHMS
DC OUTPUT CURRENT	300 275	MA.
DC OUTPUT VOLTAGE AT FILTER INPUT	290 460	VOLTS

FULL-WAVE RECTIFIER - CHOKE INPUT FILTER

FILAMENT VOLTAGE	5.0	VOLTS
FILAMENT CURRENT	3.0	AMP.
AC PLATE SUPPLY VOLTAGE (EACH PLATE) RMS ^B	550	VOLTS
FILTER INPUT CHOKE	10	HENRYS
DC OUTPUT CURRENT	275	MA.
DC OUTPUT VOLTAGE AT FILTER INPUT	420	VOLTS

^B AC PLATE VOLTAGE IS MEASURED WITHOUT LOAD.

